
MINMILE
Smart Technology

- Used in chemical, oil refining, oil exploitation, offshore oil platforms, oil tankers, military and other hazardous areas.Used as lighting, power and maintenance distribution boards.
- Suitable for controlling the temperature maintenance and the power supply of electric heating in the anti-freezing in hazardous area; Adopting different instruments and program control modules to control the temperature of the heating object so as to meet the requirements of different customers;
- The various mounting types and cable entries are available as per customers requirements, such as hanging mounting and stand floor mounting.The cable entries can be suit for rubber cable, armored cable.

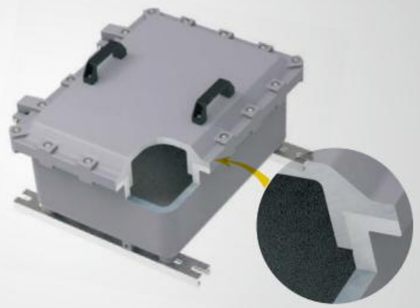

Model Identification

MAMC – □ □

□ 03:Electrical control box
05:Control station
08:Junction box
12:Temperature control box
14:AP access point

□ Enclosure code
C4:300*350*230
C5:350*450*205
C6:450*560*210
C7:450*560*280
C8:560*720*350


For Example:MAMC-03-C7 is an explosion-proof electrical control box with a shell size of 450*560*280mm.

General Technical Parameters


Explosion protection Gas explosion protection Dust explosion protection	GB Ex db ⅡC T6… T4 Gb Ex tb ⅢC T80℃…T135℃ Db
conformity to standard	GB/T 3836.1-2021,GB/T 3836.2-2021,GB/T 3836.31-2021
General power supply	Rated voltage: Max.1000V Rated current: Max.1000A
IP degree & Anti-corrosion level	IP66、WF2、 -40℃~+60℃
The material of exposed fastener	Ss304,/ss316 stainless steel
Enclosure material	Copper-free Aluminum Alloy ZL102
powder coated and color	Electrostatic powder coating , International standard color code :RAL 7035 optional
Built-in components Normal components brand siemens、 schneider、 ABB	MCB,MCCB,AC contactor,Thermal Relay,MTH,SHK-M,Auxiliary Relay,Time Relay,SSR, PLC,Mutual inductor,FU,Frequency Converter,Soft Starter etc. Note: Above leakage circuit breaker fully realize self-resetting in outside box, no need to open the cover of box
Built-in instrument	Different display instruments such as Program control modules, thermostat, ammeter and voltmeter. Note: Above instruments can be viewed and operated.
Brand of terminals	, etc.
Cable entry	Armored cable, Rubber cable

MINMILE
Smart Technology

Product outline and installation dimensions

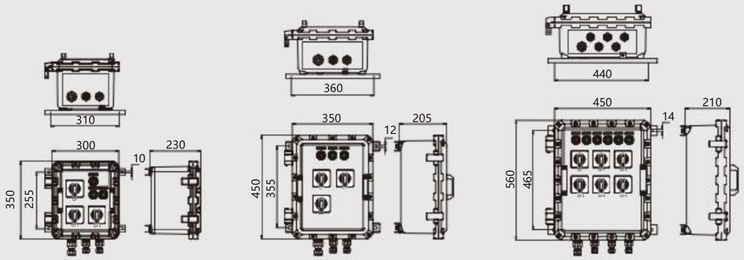

双c认证是

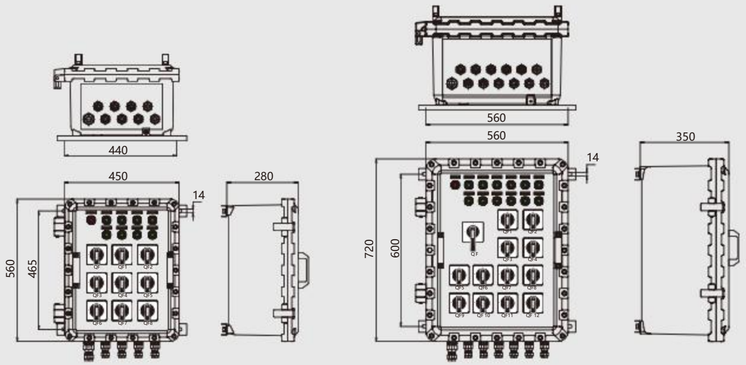

Product outline and installation dimensions

